SL-180B



Reliable measurement of water level for water level monitoring and automatic control of pump






Submerged Level Detector **SL-180B**



Please read the operation manual before using the product.

Specifications

Measuring range	Range selectable from 0 - 0.1 m to 0 - 40 m	Lightning protection	10 kV(lightning protection circuits built in power supply and output sections)
Accuracy	$\pm 0.2\%$ of span (±0.5% in the case of 0 - 0.8 m)		
Temperature characteristic	$\pm 0.015\% /^{\circ}\text{C}$ of span ($\pm 0.05\% /^{\circ}\text{C}$ in the case of 0 - 0.8 m)	Material	Detector : Type 316 stainless steel Junction box : SMC resin
Operating temperature range	Detector: -10 to 50°C (no freezing allowed) Junction box: -5 to 60°C (Guaranteed Indicater operating range: 0 to 50°C)		
		Hollow cable	Outer diameter : 12 mm Jacket : heat-resistant vinyl sheath
Output signal	4 to 20mADC (2-wire type) Allowable load resistance : 390Ω (at power supply voltage 24V)	Lifting chain	Wire diameter : 3 mm Material : Type 316 stainless steel
Allowable overload	3 m when maximum measurement value is 0.8 m or less 12 m when maximum measurement value is more than 0.8 m and up to 3 m 45 m when maximum measurement value is more than 3 m and up to 40 m	Weight	Detector : approx. 2.5 kg Junction box : approx. 0.9 kg
		Power source	DC16.2 to 30V

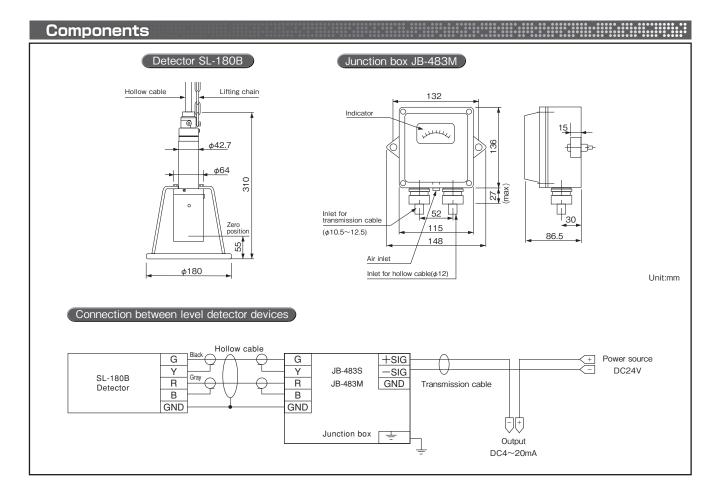

*Specifications in this catalog are subject to change without prior notice due to product improvement.



JFE Advantech Co., Ltd. URL: https://www.jfe-advantech.co.jp/eng/

Tokyo Office (Overseas Sales Department)

JFE Kuramae Bldg. 2F ,2-17-4 Kuramae, Taito-ku, Tokyo 111-0051, Japan Tel.+81-3-5825-5577 Fax.+81-3-5825-5591

Water Environment Division

3-48, Takahata cho, Nishinomiya, Hyogo, 663-8202, Japan Tel.+81-798-66-1502 Fax.+81-798-65-7025

EC-SL180B-04A 22.02.0000J