

Differential Transformer Type

Submerged Level Detector

SL-180B

ISO9001



JQA-0950

Reliable measurement of water level
For water level monitoring and automatic control of pump



**For water purification plants and
small water-supply systems**



- Accuracy of $\pm 0.2\%$
- Differential transformer system for excellent lightning protection and high resistance to environmental factors
- Easy maintenance



JFE Advantech Co., Ltd.




Submerged Level Detector SL-180B

Please read the operation manual before using the product.

Specifications

Measuring range	Range selectable from 0 - 0.1 m to 0 - 40 m	Lightning protection	10 kV (lightning protection circuits built in output sections)
Accuracy	±0.2% of span (±0.5% in the case of 0 - 0.8 m)	Material	Detector : Type 316 stainless steel Junction box : Unsaturated Polyester resin
Temperature characteristic	±0.015%F.S./°C (±0.05%F.S./°C in the case of 0 - 0.8m)	Hollow cable	Outer diameter : 12 mm Jacket : heat-resistant vinyl sheath
Operating temperature range	Detector : -10 to 50°C (no freezing allowed) Junction box : -5 to 60°C (Guaranteed indicator operating range : -10 to 55°C)	Lifting chain	Wire diameter : 3 mm Material : Type 316 stainless steel
Output signal	4 to 20mADC (2-wire type) Allowable load resistance : 395Ω (at power supply voltage 24V)	Weight	Detector : approx. 2.5 kg Junction box : approx. 1.3 kg
Allowable overload	3 m when maximum measurement value is 0.8 m or less 12 m when maximum measurement value is more than 0.8 m and up to 3 m 45 m when maximum measurement value is more than 3 m and up to 40 m	Power source	16.1 to 30VDC

Components

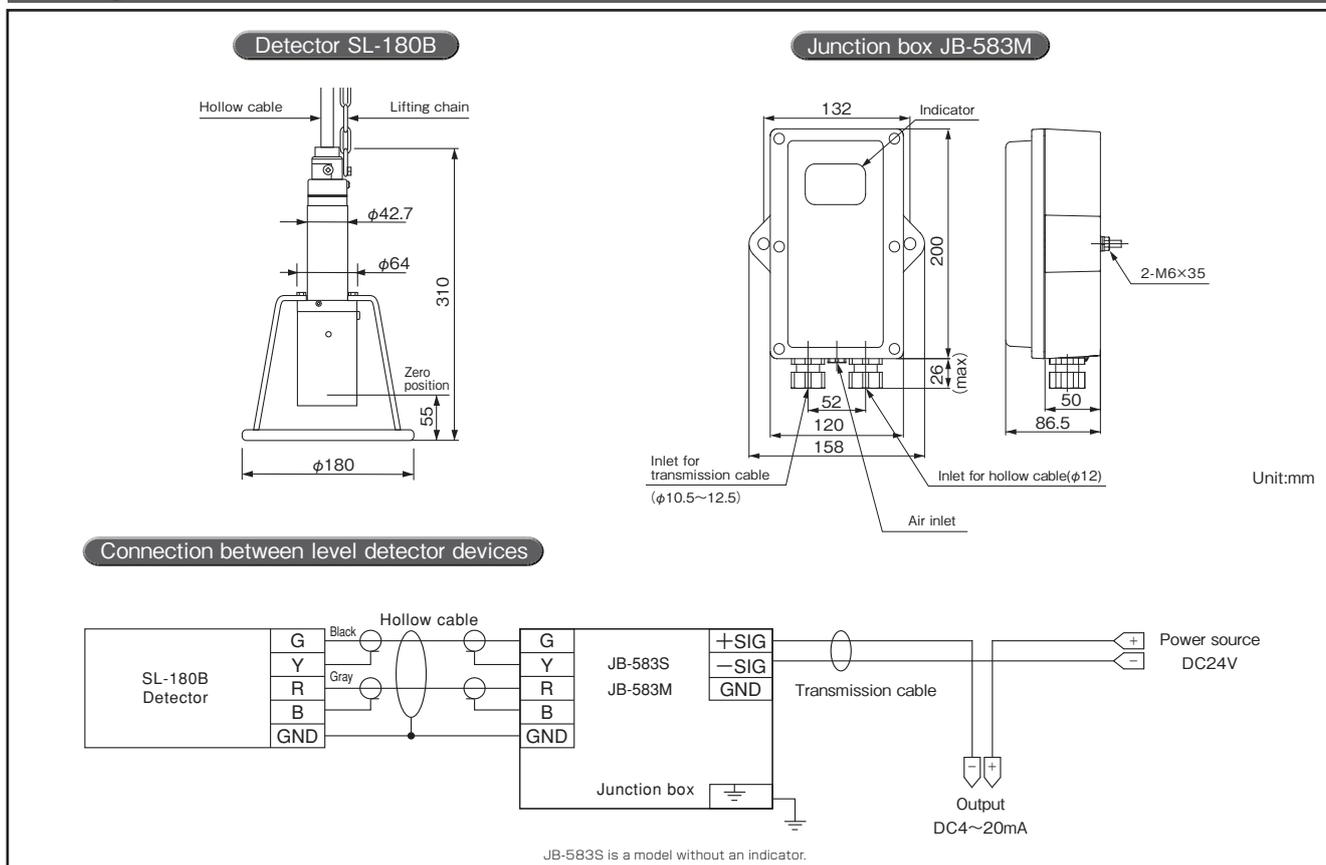

*Specifications in this catalog are subject to change without prior notice due to product improvement.

JFE Advantech Co., Ltd.
URL : <https://www.jfe-advantech.co.jp/eng/>

Tokyo Office (Overseas Sales Department)
JFE Kuramae Bldg. 2F, 2-17-4 Kuramae, Taito-ku, Tokyo
111-0051, Japan
Tel.+81-3-5825-5577 Fax.+81-3-5825-5591

Water Environment Division
3-48, Takahata cho, Nishinomiya, Hyogo,
663-8202, Japan
Tel.+81-798-66-1502 Fax.+81-798-65-7025